



# Biomass Silo Systems


## W822 - 8 Ton Pellet Store

This 2m square footprint silo provides a robust, reliable and cost effective means of storing your wood pellet fuel and can come in both indoor and outdoor models. Manufactured from galvanised steel they are designed to be flat packed allowing them to be delivered direct to site for quick and easy assembly.

The feed outlet is suitable for either auger or vacuum extraction and a range of optional extra's allow users to customise the silo to their exact requirements.

Product Code	W822
Footprint	2m x 2m
Height	4.575m
Volume	15.32m <sup>3</sup>
Useful Capacity	8.8 Tons
Flat Packed Dimensions	(L)2500mm x (W)1250mm x (H)1000mm
Empty Weight	625kgs
Approx Assembly Time	8 hours for two people

## Standard Features

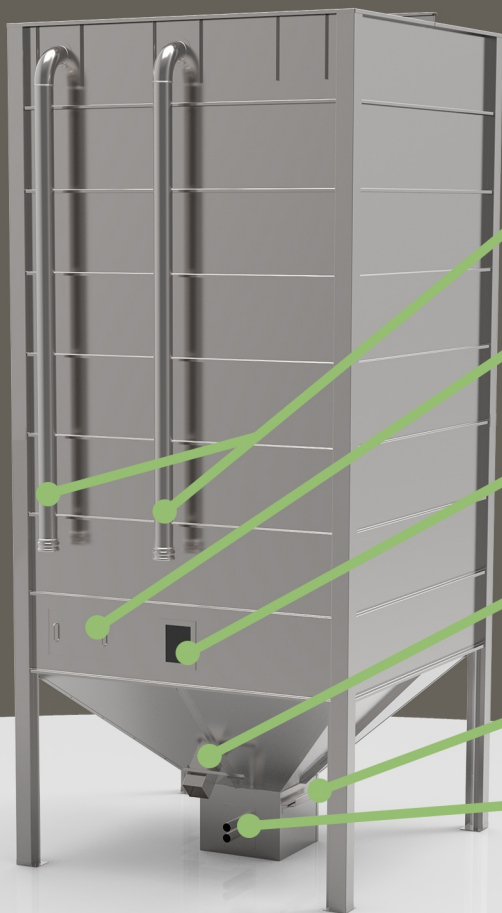

### Bulk Delivery Connections

Filling and ventilation pipework with delivery connections

### Bag Filling Panel

For bag filling and periodic cleaning and maintenance

### Inspection Window

For checking pellet levels

### Manual Extraction Chute

For withdrawing pellets can be positioned on any side

### Feed Shut Off Slide

To isolate feedbox during cleaning filling or maintenance


### Feed Outlet

Choice of standard auger or vacuum feed outlets

### Dust Removal Panel


For removal of dust from silo

# Feed Options

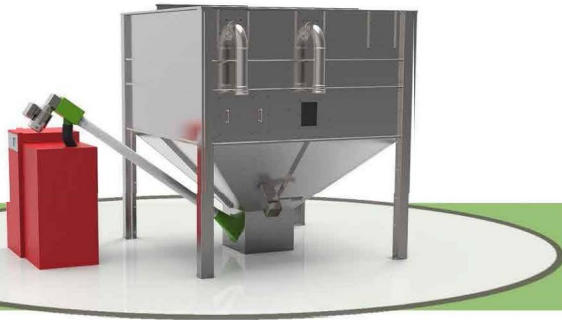

## Rigid Auger Outlet

For short auger runs we supply a rigid auger outlet which allows pellets to be collected from the base of the silo and transported to the boilers day hopper

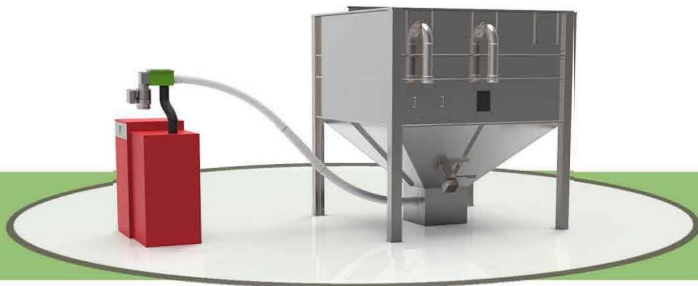

## Flex Auger Outlet

When a short straight run is not possible we can supply a flex auger outlet which allows connection to a range of longer augers which allow more flexibility in the auger run



## Vacuum Outlet

A vacuum extraction outlet allows for pneumatic extraction of the pellets over short distances. A dosing auger can also be supplied for longer vacuum distances

## Optional Extras

### Greencoat Finish



PVC coated finish gives the product a 30 year outdoor life

### Apex Roof



Optional roof design for use in areas that experience high snow loads